


AURA

FR-W2303-60L

60" Ceiling Fan

MODERN FORMS

SMART FANS

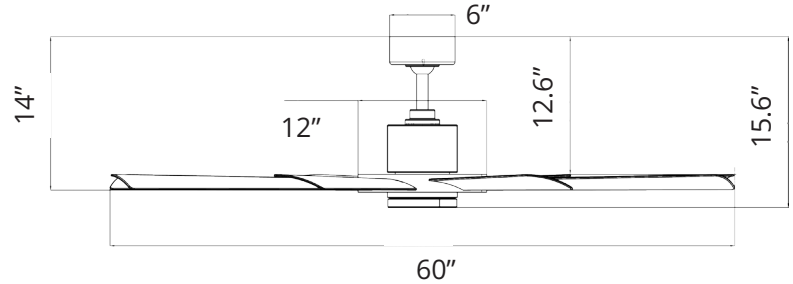

PRODUCT DESCRIPTION

The sublime Aura Smart Ceiling Fan by Modern Forms defines the look and performance you desire in your bedroom, dining, or living area. A 60" inch sweep and a broad array of eight blades transport a swiftly moving surge of air across your room from an overhead silhouette with a cool cutting edge. Each blade is expertly engineered with a subtle curve to push a relaxed, comfortable breeze down over the room. Your remote control will commission one of its six speeds and drive the engine of comfort into your home.

FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Includes BT remote control
- Optional wall control for 3, 4-way control sold separately
- Compatible with Modern Forms app

AIRFLOW/ENERGY EFFICIENCY

Weighted-Average/High Airflow CFM:	5307/7656
Weighted-Average/High Energy Use (W):	26/35
Estimated Yearly Energy Cost (\$):	7
Weighted-Average/High Efficiency (CFM/W):	205
Max RPM:	109

ORDER NUMBER

Model	Housing	Blade
FR-W2303-60L	MB <i>Matte Black</i>	MB <i>Matte Black</i>
	MB <i>Matte Black</i>	MB <i>Brushed Nickel</i>
	MB <i>Matte Black</i>	SB <i>Soft Brass</i>
	MW <i>Matte White</i>	SB <i>Soft Brass</i>
	BN <i>Brushed Nickel</i>	MW <i>Matte White</i>

Example: FR-W2303-60L-BN/MW

- *Results may vary based on application and surroundings.
- *This fan comes uni-pack - blade select options are not available

SPECIFICATIONS

Construction:	Aluminum, Steel, ABS
Blade:	16° Pitch, 60" sweep
Downrod:	.75"W x 6"H included
Mounting Slope:	Up to 30°
Wire:	80"
Hanging Weight:	21 lbs
Total Power:	55W
Standards:	UL/cUL Wet Location listed, Title 24 JA8-2016 Compliant, Title 20, Energy Star rated
Motor Type:	125 x 25 sensorless DC motor

WIRELESS PERFORMANCE

Wi-Fi Range:	Up to 150 ft*
Bluetooth Range:	Up to 150 ft*

LUMINAIRE PERFORMANCE

Light Source:	LED
Light Wattage:	19.5W
Lumens/Delivered Lumens:	1600/944
Dimming:	Integrated
CRI:	90
CCT Color Temperature:	2700K, 3000K, 4000K, 5000K selectable
Rated Life:	50,000 hours

The Modern Forms app synchronizes seamlessly with smart home devices you already own



modernforms.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

AURA






FR-W2303-60L

60" Ceiling Fan

MODERN FORMS

SMART FANS

OPTIONAL ACCESSORIES

Bluetooth Wall Control		F-WCBT	WT White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.
Bluetooth Remote Control		F-RCBT	WT White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with Modern Forms Smart Fans. Includes easy-to-install wall cradle and batteries.
Downrod		XF-12 12IN XF-18 18IN XF-24 24IN XF-36 36IN XF-48 48IN XF-60 60IN XF-72 72IN		All our downrods are .75 (in) I.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers		XF-I		Connects two downrods together.
Sloped Ceiling Kit		XF-SCK		Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.

Examples: Wall Control: **F-WCBT-WT**, Remote Control: **F-RCBT-WT**, Downrod: **XF-12-MB**, Downrod Coupler: **XF-I-MB**, Sloped Ceiling Kit: **XF-SCK-MW**

SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

NOTE: Recommended maximum downrod length of 72" with 80" lead wire